

INNOVATION LEADS TO VALUE



SUNWARD

SWE 50UF MINI EXCAVATOR

◆ Total weight: 5350kg

◆ Engine power: 29.7kW/2200rpm

◆ Bucket capacity: 0.14m³



◆ Comfortable and intelligent

The cab has a large field of vision, large space, and comfortable shock-absorbing seats; the 7-inch color touch screen can realize flow adjustment of crushing piping and attachment piping and intelligent control experience.

◆ Flexible construction

Zero-tail swing and boom deflection shall cope with the working conditions in narrow spaces. Side and corner operations can be successfully carried out, without frequent machine movement.

◆ Stable and reliable

There is a large undercarriage for higher stability. The machine can easily move on muddy roads through a large displacement travel motor.




◆ Convenient maintenance

Lubrication and maintenance can be completed in one posture. It is equipped with a full-open cover, easy to maintain.



Performance Parameters of Machine

Operating mass	kg	5350
Bucket capacity	m ³	0.14
Engine	Brand	Kubota
	Model	D1803-T
	Rated power	kW/rpm 29.7/2200
	Max. torque	N·m/rpm 150/1500
	Displacement	L 1.8
Type of primary pump		Variable plunger pump
Max. flow of primary pump	L/min	121
System pressure	Mpa	26
Swing speed	rpm	10.7
Travel speed	km/h	4.3/2.5
Bucket digging force	kN	34
Arm digging force	kN	23
Max. drawbar pull	kN	48.6
Gradeability	%	70
Ground pressure	kPa	31
Capacity of fuel tank	L	70
Capacity of hydraulic tank	L	70

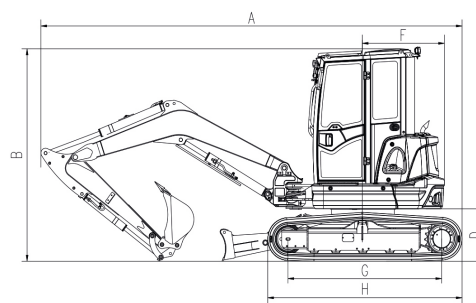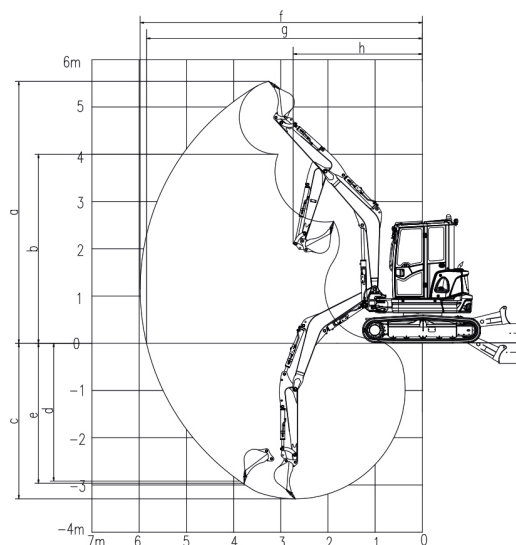

Working range

	Boom length	mm	2700
	Arm length	mm	1550
a	Max. digging height	mm	5535
b	Max. dumping height	mm	3955
c	Max. digging depth	mm	3375
d	Digging depth (2.44 m, horizontal)	mm	2920
e	Max. vertical digging depth	mm	2965
f	Max. digging reach	mm	5940
g	Max. ground digging reach	mm	5845
h	Min. front swing radius	mm	2825
i	Max. lift height of dozer blade	mm	400
j	Max. digging depth of dozer blade	mm	436

Outline dimensions

A	Total length	mm	5435	I	Track gauge	mm	1600
B	Total height	mm	2570	J	Track width	mm	2000
C	Total width	mm	2000	K	Track shoe width	mm	400
D	Ground clearance of counterweight	mm	640	L	Max. height of cab	mm	2570
E	Min. ground clearance	mm	330	N	Uppercarriage width	mm	1845
F	Tail swing radius	mm	1050				

◆ The above parameters may be different due to product upgrading.

